

GS/P INOX 25S4 1185X555

INTELLIGENT WEIGHING SYSTEM



SCALE TRUCKS GS/P - PX20

The Lifter scale truck series is available in two models, both of which are equipped with an intelligent weighing device with numerous options. It is suitable for lifting and carrying heavy loads; it is therefore very precise and functional in all internal weighing operations.

DISPLAY

The PX20 pallet truck is a simple, economical and robust tool to be used for the weighing of transported loads. Its large-sized LCD display allows for easy reading of weight and the setting of tare simply and immediately.

GS/P 25 INOX

GS/P differs from PX20 due to its hydraulic unit of higher load capacity (2,500 kg) and the bigger number of functions, such as the items counter and the load totalization indicator. The pallet truck may also be equipped with a thermal printer, memory card SD or may be provided in the INOX version.

FRAME STRUCTURE

The structure is made up of a double frame and a lower fork on which a counter fork is placed; both forks house four load cells that allow for a uniform load distribution, thus keeping weighing precision even in case of collision and unbalanced load.

MEMORY CARD SD

GS/P pallet truck is available with printing on SD memory card and certified weighing.



Description

1.1 Manufacturer	LIFTER		
1.3 Drive	Manual		
1.4 Operator type	Pedestrian		
1.5 Load capacity	Q	Kg	2500
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	975
1.9 Wheel base	y	mm	1255

Weights

2.1 Service weight (battery included)	Kg	117
2.2 Axle load, laden rear	Kg	1834
2.2 Axle load, laden front	Kg	783
2.3 Axle load, unladen front	Kg	73
2.3 Axle load, unladen rear	Kg	44

Tyres/Chassis

3.1 Tyres: front wheels	NYLON EXTRA		
3.1 Tyres: rear wheels	NYLON EXTRA		
3.2 Tyre size: Steering wheels - Width	mm	50	
3.2 Tyre size: Steering wheels - Diameter	mm	200	
3.3 Tyre size: Load rollers - Diameter	mm	82	
3.3 Tyre size: Load rollers - Width	mm	60	
3.5 Tyre size: rear wheels - Q.ty (X=driven)	nr	4	
3.5 Rear balancing axle	No		
3.6 Tread, front	b10 mm	155	
3.7 Tread, rear	b11 mm	375	

Dimensions



4.4 Lift height	h3 mm	115
4.9 Height of tiller in drive position max	h14 mm	1160
4.15 Height, lowered	h13 mm	90
4.19 Overall length	l1 mm	1600
4.20 Length to face of forks	l2 mm	415
4.21 Overall width	b1 mm	555
4.22 Fork dimensions - Thickness	s mm	60
4.22 Fork dimensions - Width	e mm	180
4.22 Fork dimensions - Length	l mm	1185
4.25 Distance between fork arms	b5 mm	555
4.32 Ground clearance, centre of wheelbase	m2 mm	30
4.34 Aisle width	Ast mm	1815
4.35 Turning radius	Wa mm	1390

Performance data

5.2 Lifting speed laden	strokes	13
5.2 Lifting speed unladen	strokes	13

Scale

Type	DFW 06	
Digits	Q.ty	6
Digit height	mm	25
Kilograms	Yes	
Lbs	Yes	
Tare	Yes	
Auto-off	Yes	
Totalization	Yes	
Counting	Yes	
Paper	size	Ø50x57.5 (55-70 g/m2)
Operating time	h	50
Accuracy	%	0.05
Shear-beam load cells	Q.ty	4
Division	Kg	0.5
6.4 Battery voltage	V	6
6.4 Battery capacity	Ah	4

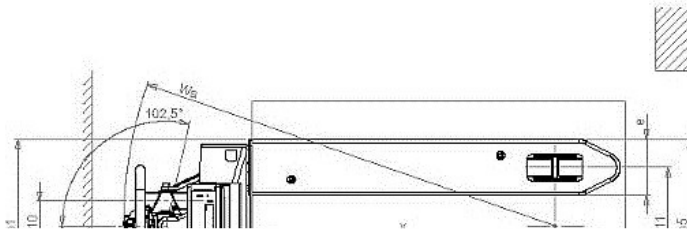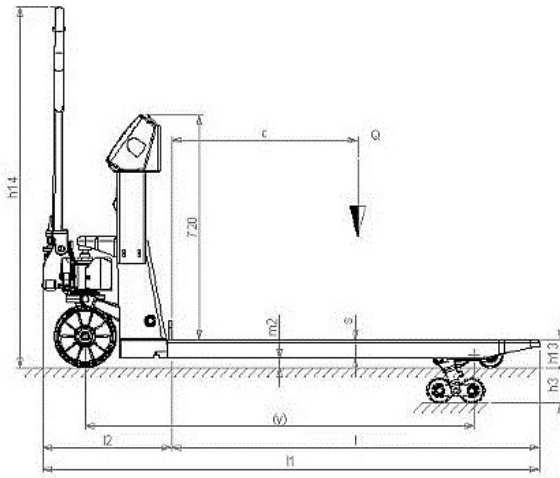

Printed on 4/11/2015 (ID 629)

©2012 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).

