

SILLA



dumper 1200 SN/P





dumper 1200 SN/P

SCARICO IDRAULICO FRONTALE CON PALA AUTOCARICANTE
DESCHARGEMENT HYDRAULIQUE FRONTAL AVEC PELLE CHARGEUSE
HYDRAULIC FRONTAL TIPPING WITH SHOVEL
DESCARGA HIDRAULICA FRONTAL CON PALA

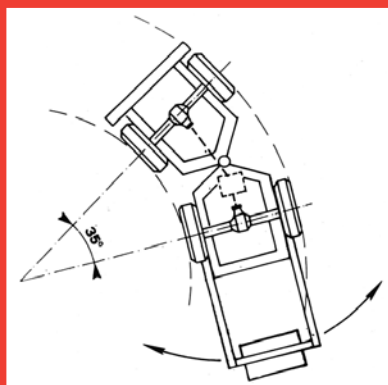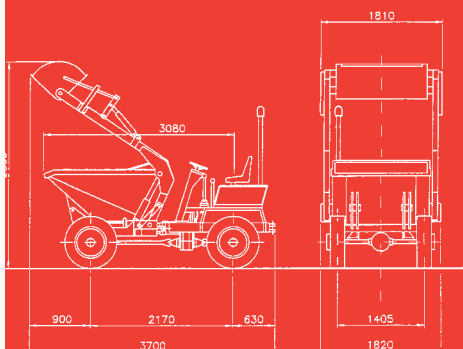

CARATTERISTICHE TECNICHE DONNEES TECHNIQUES SPECIFICATIONS CARACTERISTICAS TECNICAS		Dumper 1200 SN/P	
CAPACITA' DELLA BENNA - CAPACITE' DE LA BENNE - SKIP CAPACITIES - CAPACIDAD DE LA TOLVA			
A RASO A RAS STRUCK NIVEL DE AGUA	1.200 ltr.	A COLMO COMBLEE HEAPED COLMADA	1.500 ltr.
PORTATA PORTEE MAX PAYLOAD CARGA UTIL			3.000 Kg
PESO A VUOTO POIDS A VIDE UNLOADED WEIGHT PESO EN VACIO			1.700 Kg
MOTORE DIESEL LOMBARDINI / HATZ AVV. ELETTRICO MOTEUR DIESEL LOMBARDINI / HATZ DEMARRAGE ELECTRIQUE DIESEL ENGINE LOMBARDINI / HATZ ELECTRIC START MOTOR DIESEL LOMBARDINI / HATZ ARRANQUE ELECTRICO			9 LD625.2 / 2G40
POTENZA PUISSANCE POWER POTENCIA MOTOR			HP 28,5 / 23
Nr. CILINDRI Nr. CYLINDRES Nr. CYLINDERS Nr. CILINDROS			2
TRASMISSIONE MECCANICA TRANSMISSION MECANIQUE MECHANICAL TRANSMISSION TRANSMISION MECANICA MEDIANTE CARDAN			●
MARCE AVANTI / RETRO VITESSE AV/AR FORWARD / REVERSE GEARS VELOCIDADES ADELANTE / ATRAS			4/4
FRIZIONE MONODISCO A SECCO EMBAYAGE MONODISQUE A SEC SINGLE DRY PLATE CLUTCH EMBRAGUE MONODISCO EN SECO			●
VELOCITA' MAX VITESSE MAX MAX SPEED VELOCIDAD MAX			25 Km/h
FRENI IDRAULICI SULLE 4 RUOTE FREINS HYDRAULIQUES SUR LES 4 ROUES BRAKES 4 WHEELS HYDRAULIC FOOTBRAKES FRENOS HIDRAULICOS SOBRE LAS 4 RUEDAS			●
RUOTE MOTRICI ROUES MOTRICES WHEELS DRIVE RUEDAS MOTRICES			4
PNEUMATICI PNEUS TYRES NEUMATICOS			10,0 / 75 - 15,3

SILLA Macchine Edili e Stradali S.r.l.

53036 POGGIBONSI (SI) ITALY - Via San Gimignano, 96

Tel. +39.0577.938.051 - Fax +39.0577.981.609

e-mail: info@sillaitaly.com - www.sillaitaly.com